


Pillow Block Bearings  
UEU,LEU,UYU,LYU,LKU+H  
Series Pillow Block  
Bearings-



WUXI GUANGQIANG BEARING TRADE CO.,LTD

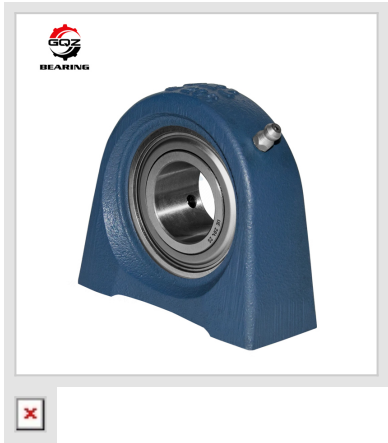

|                 |            |
|-----------------|------------|
| Model           | LEU 208 2F |
| Dimensions (mm) |            |
| d               | 40         |
| L               | 116        |
| A               | 48         |
| A <sub>1</sub>  | 30         |
| J               | 88.9       |
| G               | M12        |
| G <sub>1</sub>  | 20         |
| H               | 98.2       |
| H <sub>1</sub>  | 49.2       |
| S <sub>1</sub>  | 30.2       |
| Fig.            | 2          |
| Mass            |            |
| kg              | 1.67       |

**UEU LEU UYU LYU LKU+H Series Extra Long U Stroke Take-Up Bearing UEU LEU UYU LYU LKU+H Cast Iron Long Slotted Base Concentric Eccentric Tapered Bore Insert Bearing For Long-Distance Conveyor Mining Heavy Agricultural Transport Machinery**

**UEU,LEU,UYU,LYU,LKU+H Series Pillow Block Bearings Technical Parameter**

| Comparison Item | UEU (Concentric Split Collar Extra Long Take-Up Unit) | LEU (Dual Extended Eccentric Triple Mud Seal Extra Long Take-Up Unit) | UYU (Single Extended Eccentric Medium Extra Long Take-Up Unit) | LYU (Economical Single Extended Eccentric Extra Long Take-Up Unit) | LKU+H (Tapered Bore + H Sleeve Extra Long Take-Up Unit) |
|-----------------|-------------------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------|
|-----------------|-------------------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------|

# UEULEUUYULYULKUH-Series-Pillow-Block-Bearings

| <b>Comparison Item</b>      | <b>UEU (Concentric Split Collar Extra Long Take-Up Unit)</b>                                               | <b>LEU (Dual Extended Eccentric Triple Mud Seal Extra Long Take-Up Unit)</b>                           | <b>UYU (Single Extended Eccentric Medium Extra Long Take-Up Unit)</b>                     | <b>LYU (Economical Single Extended Eccentric Extra Long Take-Up Unit)</b>                  | <b>LKU+H (Tapered Bore + H Sleeve Extra Long Take-Up Unit)</b>                                      |
|-----------------------------|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| Matching Insert Bearing     | UE Concentric Split Collar Insert                                                                          | LE Double-Side Extended Inner Single Eccentric Insert                                                  | UY Single-Side Extended Inner Single Eccentric Insert                                     | LY Economical Single-Side Extended Inner Single Eccentric Insert                           | UK 1:12 Tapered Bore Insert + H Adapter Sleeve                                                      |
| Housing Feature             | U extra long slotted cast iron, maximum adjustment stroke, thick wall heavy-duty                           | Reinforced ultra-long U sliding housing, anti-crack for mining/muddy heavy conveyors                   | Standard U long take-up base, balanced long travel & medium load cost                     | Simplified U long sliding base, lowest cost light-duty long-stroke take-up housing         | Universal U extra long take-up housing compatible with taper sleeve inserts                         |
| Inner Ring Structure        | Standard wide inner ring, no extension                                                                     | Symmetric double-side wide extended inner ring                                                         | Single-side wide extended inner ring                                                      | Simplified single-side extended inner ring                                                 | Tapered 1:12 inner bore, no extension                                                               |
| Locking Mechanism           | 360° full circumferential split collar, uniform clamping force                                             | Single eccentric collar, maximum contact anti-slip area under heavy vibration                          | Single eccentric collar, medium anti-slip friction torque                                 | Single eccentric collar, basic economical locking structure                                | Tapered bore + H sleeve interference fit                                                            |
| Standard Seal               | SL double-lip reinforced NBR with steel anti-dust flinger                                                  | 3S triple-lip ultra heavy mud seal + outer anti-mud slinger                                            | SL double-lip dust & light mud reinforced seal                                            | SL lightweight double-lip dust-proof seal                                                  | SL double-lip general dust & coolant seal                                                           |
| Grease Nipple               | Single side grease fitting                                                                                 | Dual-side full coverage grease nipples for full raceway lubrication                                    | Single grease nipple                                                                      | Single simplified grease nipple                                                            | Single side grease fitting                                                                          |
| Rotation Adaptation         | Bidirectional, frequent forward-reverse, medium-high speed medium-heavy load                               | Only unidirectional, severe mud/straw heavy vibration mining/harvester long conveyors                  | Only unidirectional, semi-outdoor dry grain long-distance heavy transport                 | Only unidirectional, indoor dry light load, ultra-strict long-stroke budget control        | Bidirectional rotation, polished smooth unthreaded heavy tension shafts                             |
| Anti-Slip Grade             | Excellent, zero shaft indentation or scratch                                                               | Top-tier heavy vibration anti-loosening performance                                                    | Good medium-heavy vibration anti-slip capacity                                            | Basic economical anti-slip performance                                                     | Uniform circumferential clamping, no shaft surface damage                                           |
| Typical Working Environment | Long-distance bidirectional industrial fans, heavy packaging long conveyors, large textile tension rollers | Large combine harvesters, mining stone long belt conveyors, outdoor heavy grain drying transport lines | Dry grain long-distance belt tensioners, semi-outdoor medium agricultural heavy machinery | Indoor large packaging long conveyor tension adjustment, woodworking heavy transport lines | Polished smooth unthreaded heavy drive shafts, large printing/textile long-stroke tension equipment |

## UEULEUUYULYULKUH-Series-Pillow-Block-Bearings

| Comparison Item       | UEU<br>(Concentric Split Collar Extra Long Take-Up Unit) | LEU (Dual Extended Eccentric Triple Mud Seal Extra Long Take-Up Unit) | UYU (Single Extended Eccentric Medium Extra Long Take-Up Unit) | LYU<br>(Economical Single Extended Eccentric Extra Long Take-Up Unit) | LKU+H<br>(Tapered Bore + H Sleeve Extra Long Take-Up Unit) |
|-----------------------|----------------------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------|-----------------------------------------------------------------------|------------------------------------------------------------|
| Cost Level            | Medium-High                                              | Medium                                                                | Medium-Low                                                     | Lowest U extra long stroke take-up unit                               | Medium-High (extra H sleeve cost)                          |
| Interchange Reference | Long stroke UET concentric take-up extended variant      | Long stroke LET triple mud seal eccentric take-up extended variant    | Long stroke SAT/UYT single eccentric take-up extended variant  | Economical LS/SA long U sliding base take-up assemblies               | Long stroke UKT+H tapered bore take-up extended variant    |

### Series Naming Rule Explanation

- Suffix U = Extra Long Slotted Take-Up Housing: Extra long sliding adjustment slot, larger linear travel range for heavy belt/chain tension fine-tuning, thicker reinforced cast iron for heavy shock loads; compared with T-type short take-up base, U-type has double adjustment stroke.
- Middle code = Insert bearing locking & inner ring structure:
  - EU (UEU) = UE concentric split collar insert (wide inner ring, 360° uniform clamping, bidirectional rotation)
  - EU (LEU) = LE double-side symmetric extended inner single eccentric insert (triple heavy mud seal, unidirectional severe muddy outdoor sites)
  - YU (UYU) = UY single-side extended inner single eccentric insert (double-lip reinforced seal, medium vibration unidirectional)
  - YU (LYU) = LY economical single-side extended inner single eccentric insert (light dust seal, budget light-medium load indoor equipment)
  - KU+H (LKU+H) = UK 1:12 tapered bore insert + H split adapter sleeve (smooth unthreaded shaft, zero shaft scratch)

Full complete unit codes:

- UEU = UEU Series (UE concentric split collar insert + U extra long stroke take-up housing)

- LEU = LEU Series (LE dual extended eccentric insert + U extra long stroke take-up housing)
- UYU = UYU Series (UY single extended eccentric insert + U extra long stroke take-up housing)
- LYU = LYU Series (LY economical single extended eccentric insert + U extra long stroke take-up housing)
- LKU+H = LKU+H Series (UK tapered bore insert + H sleeve + U extra long stroke take-up housing)

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-  
Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com